

# BELT FLAG PATTERN



Produced by the House Volant Maester's Guild



# PATTERN NOTES


**FABRIC SUGGESTIONS:** Linen blends work very well for this since they are light weight and durable. Try to avoid full linen or any fabric that frays easily as the corners will be more vulnerable to tearing. If using a fabric that frays easily, I would suggest using cutting the fabric to allow a larger seam allowance around your stitch line.

**PATCHES/VINYLS/EMBROIDERY:** If you are adding any embellishments to the front of the flag. I normally will draw the pattern onto the front piece of fabric (step 3) then add the embellishment prior to sewing the front and back pieces together

# MEASUREMENTS

**FABRIC:** Cut 2 rectangles of fabric 6.5" by 18.5"


**FLAG PATTERN:** Suggest cutting a pattern out of paper or poster board to trace onto fabric – Cut as pictured

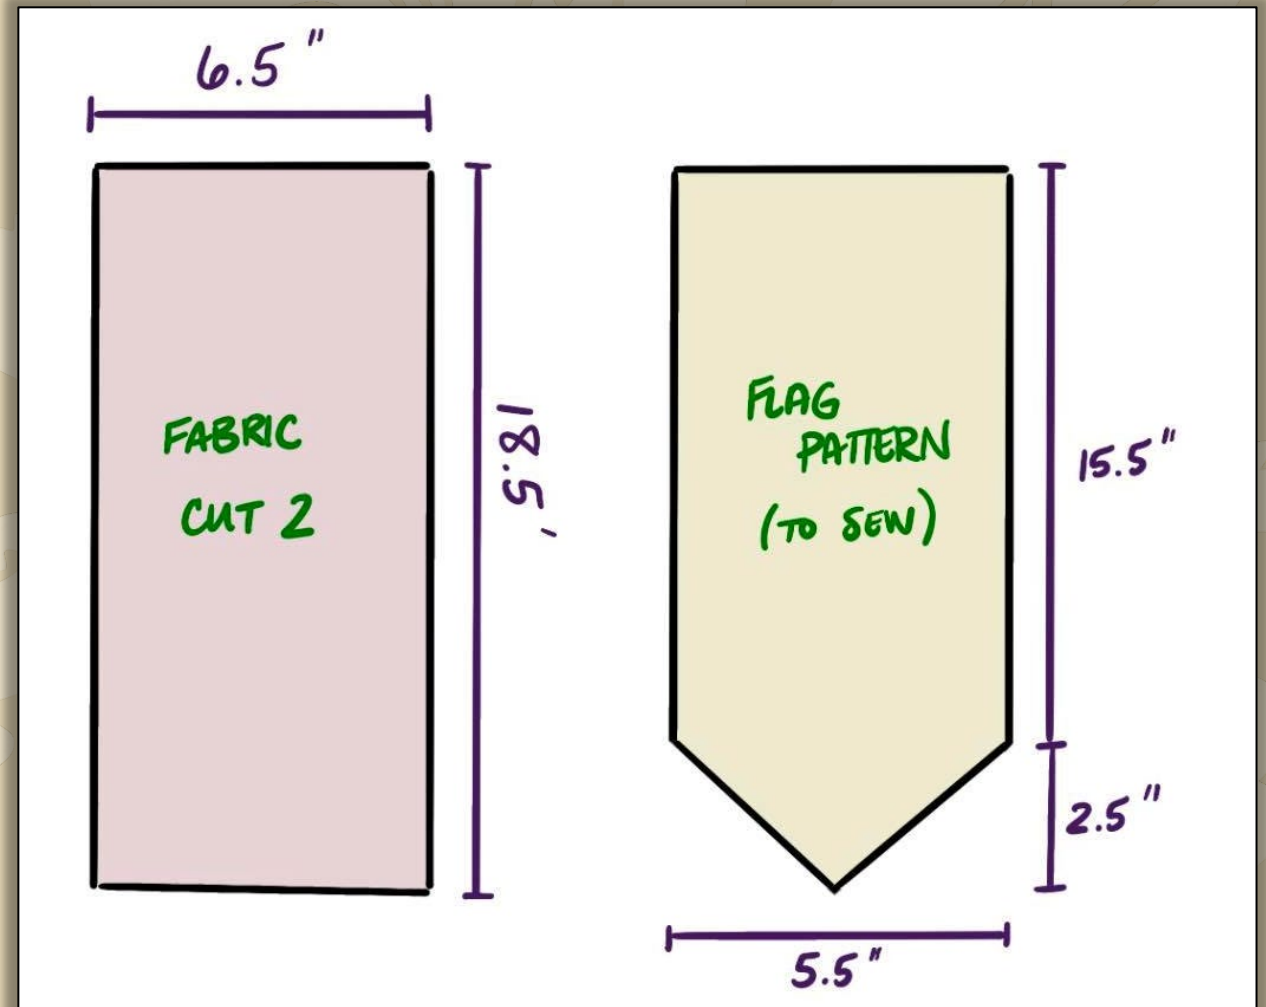

# ASSEMBLY

Step 3 & 4


1. Cut 2 pattern pieces in the desired colors
2. Place pattern pieces on top of each other, right sides in. Pin pieces together
3. Draw belt flag pattern onto top piece with chalk or fabric markers
4. Sew, using a straight stitch, along the lines of your belt flag pattern

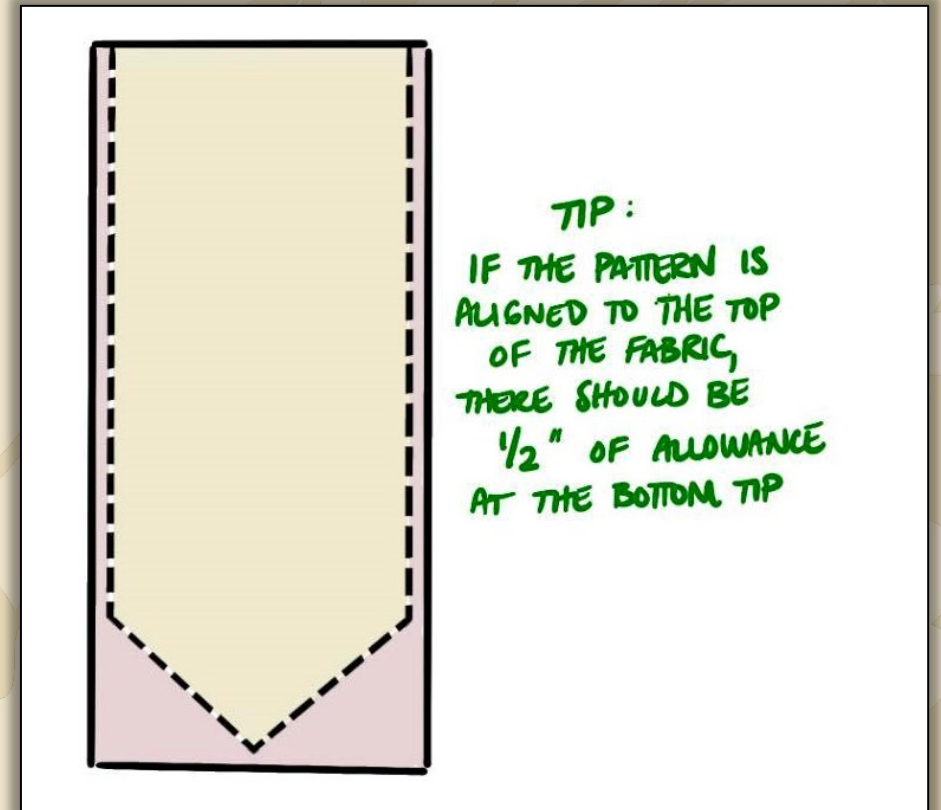

# ASSEMBLY


## Step 5

5. Trim both layers of fabric, leaving  $\frac{1}{4}$  -  $\frac{1}{2}$ " of allowance around your stitching
  - Note: Cut fabric perpendicular to corners to allow the fabric to lay flat when turned inside out
6. Turn fabric right side in and iron

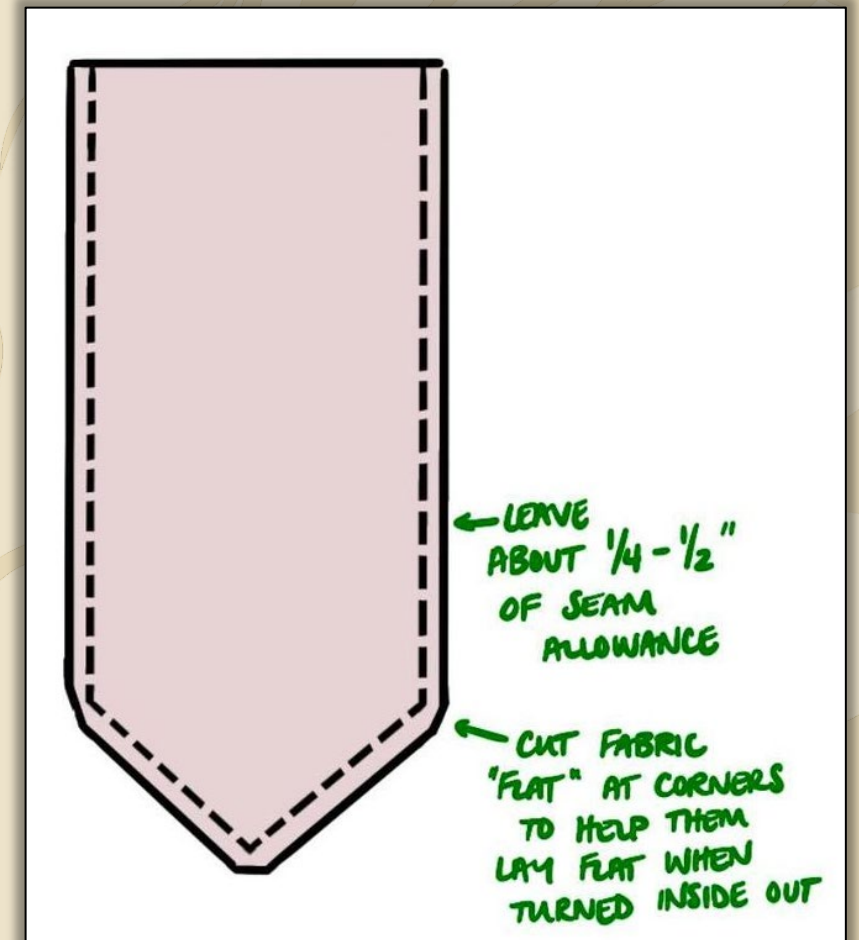

# ASSEMBLY


- Using a fabric marker, place lines across your flags at the following distances from the top of the belt flag:
  - 1", 4.5", 7.5"
- Fold down your first section (at the 1" line) and sew across approx.  $\frac{1}{4}$ " from the raw edge
- Fold down your next section (at the 4.5" line)

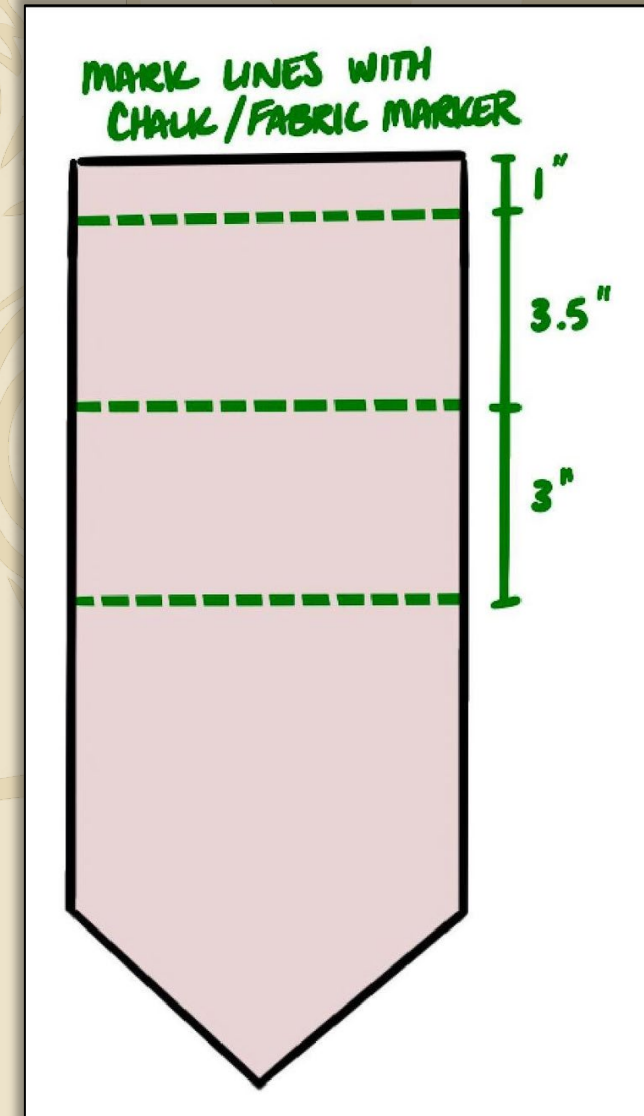

# ASSEMBLY

Step 10

10. Sew thru all layers across your 3<sup>rd</sup> line  
(at 7.5")

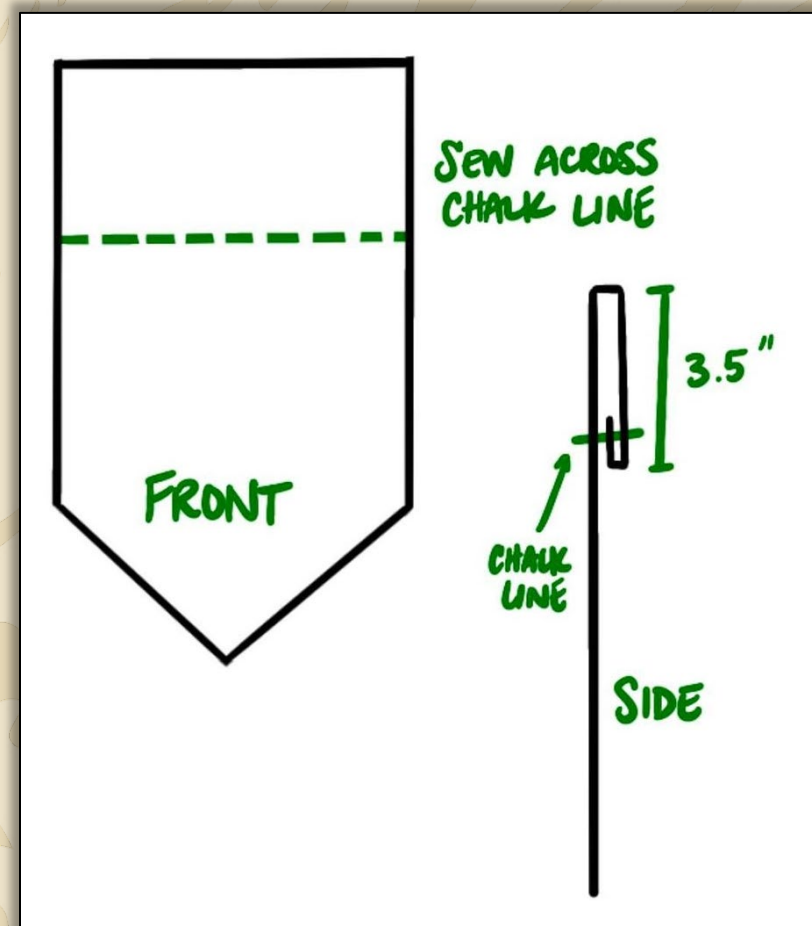

**2 COLOR OPTION**





# MEASUREMENTS


## 2 Color on front side only:

**Front Colors:** Cut 2 rectangles of fabric at 3.5" by 18.5"

**Back:** Cut 1 rectangle of fabric (back) at 6.5 by 18.5"

## 2 Color on front and back sides:

**Front and Back:** Cut 4 rectangles of fabric at 3.5" by 18.5" (2 of each color)

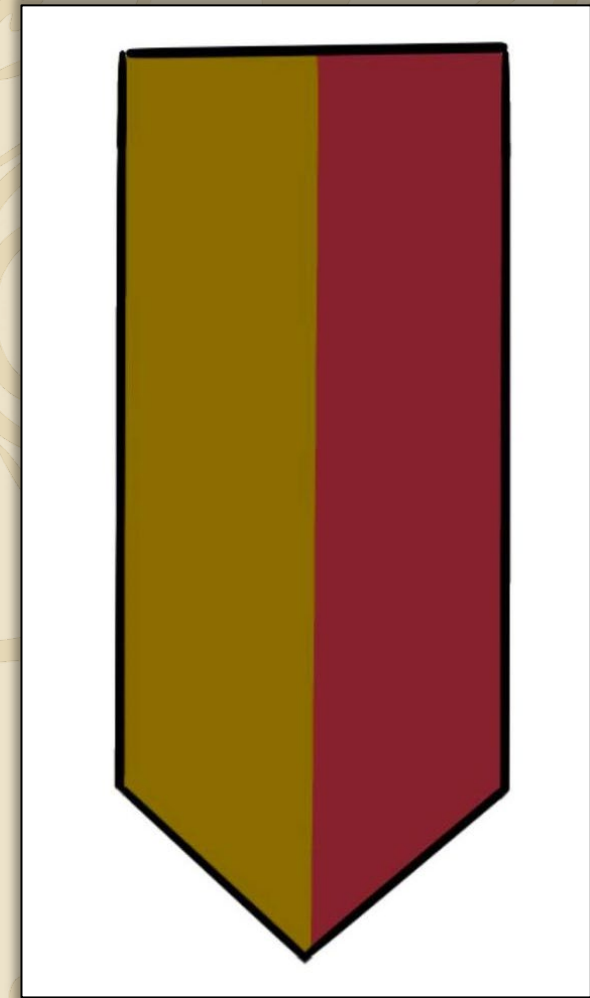

# ASSEMBLY

## Replace Step 1 --

- A. Sew front rectangles together along long edge leaving a seam allowance of approx.  $\frac{1}{4}$ " (right sides together)
  - Do the same with the back rectangles if using 2 colors on both sides
- B. Lay flat and iron the seam flat
- C. Use these as your fabric rectangles for Step 2

NOTE: When sewing the rectangles together in step 4, the middle seams should be facing out (right sides together)

# CONGRATULATIONS!



You have created a belt flag!

